

DUAL OPERATIONAL AMPLIFIERS


The LM1458 series are dual general purpose operational amplifiers, having short circuits protected and require no external components for frequency compensation.

High common mode voltage range and absence of "latch up" make the LM1458 ideal for use as voltage followers.


The high gain and wide range of operating voltage provides superior performance in integrator, summing amplifier and general feedback applications.

FEATURES


- Internal frequency compensation
- Short circuit protection
- Large common mode and differential voltage range
- No latch up
- Low power consumption

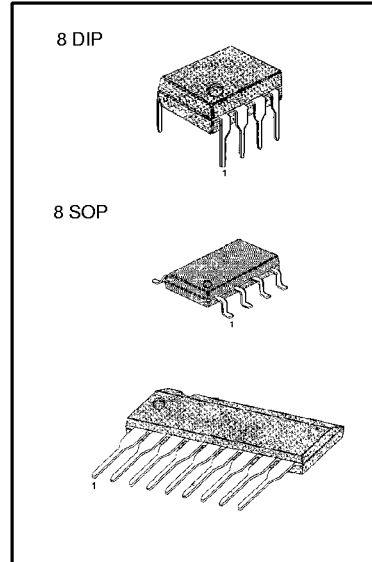

BLOCK DIAGRAM




ORDERING INFORMATION



| Device | Package | Operating Temperature |
|-----------------------|---------|-----------------------|
| LM1458N LM1458AN | 8 DIP | 0 ~ + 70°C |
| LM1458S LM1458AS | 9 SIP | |
| LM1458M LM1458AM | 8 SOP | |
| LM1458IN LM1458AIN | 8 DIP | |
| LM1458IS LM1458AIS | 9 SIP | -25 ~ + 85°C |
| LM1458IM LM1458AIM | 8 SOP | |

SCHEMATIC DIAGRAM

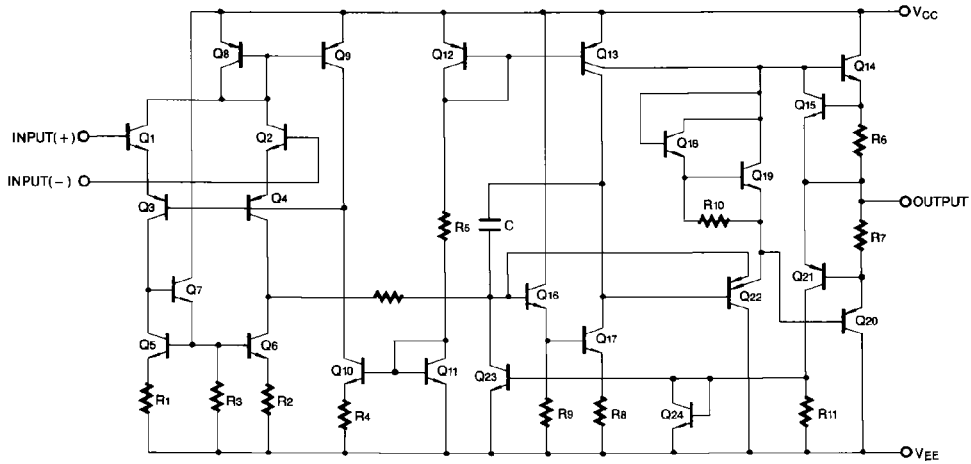

ABSOLUTE MAXIMUM RATINGS

| Characteristic | Symbol | Value | Unit |
|---------------------------------------|---------------|--------------|-------------|
| Power Supply Voltage | V_{CC} | ± 18 | V |
| Input Differential Voltage | $V_{I(DIFF)}$ | 30 | V |
| Input Voltage | V_I | ± 15 | V |
| Operating Temperature Range LM1458/AI | T_{OPR} | - 25 ~ + 85 | $^{\circ}C$ |
| LM1458/A | | 0 ~ + 70 | $^{\circ}C$ |
| Storage Temperature Range | T_{STG} | - 65 ~ + 150 | $^{\circ}C$ |

ELECTRICAL CHARACTERISTICS(V_{CC} = +15V, V_{EE} = -15V, T_A = 25 °C unless otherwise specified)

| Characteristic | Symbol | Test Conditions | LM1458A/AI | | | LM1458/I | | | Unit |
|---------------------------------|---------------------|---|------------|------|-----|----------|------|-----|------|
| | | | Min | Typ | Max | Min | Typ | Max | |
| Input Offset Voltage | V _{IO} | R _S ≤ 10KΩ | | 2.0 | 6.0 | | 2.0 | 10 | mV |
| Input Offset Current | I _{IO} | | | 20 | 200 | | 20 | 300 | nA |
| Input Bias Current | I _{BIAS} | | | 80 | 500 | | 80 | 700 | nA |
| Large Signal Voltage Gain | G _V | V _{O(P.P)} = ± 10V, R _L ≥ 2.0KΩ | 20 | 200 | | 20 | 200 | | V/mV |
| Input Voltage Range | V _{I(R)} | | ± 12 | ± 13 | | ± 11 | ± 13 | | V |
| Input Resistance | R _I | | 0.3 | 1.0 | | 0.3 | 1.0 | | MΩ |
| Common Mode Rejection Ratio | CMRR | | 70 | 90 | | 60 | 90 | | dB |
| Power Supply Rejection Ratio | PSRR | | 77 | 90 | | 77 | 90 | | dB |
| Supply Current (Both Amplifier) | I _{CC} | | | 2.3 | | | 2.3 | 8.0 | mA |
| Output Voltage Swing | V _{O(P.P)} | R _S ≤ 10KΩ | ± 12 | ± 14 | 5.6 | ± 11 | ± 14 | | V |
| | | R _S ≤ 10KΩ | ± 10 | ± 13 | | ± 9 | ± 13 | | |
| Output Short Circuit Current | I _{SC} | | | 20 | | | 20 | | mA |
| Power Consumption | P _C | V _O = 0V | | 70 | 170 | | 70 | 240 | mW |
| Transient Response (Unity Gain) | | | | | | | | | |
| Rise Time | t _{RES} | V _I = 20mV, R _L ≥ 2KΩ, C _L ≤ 100pF | | 0.3 | | | 0.3 | | μs |
| Overshoot | OS | V _I = 20mV, R _L ≥ 2KΩ, C _L ≤ 100pF | | 15 | | | 15 | | % |
| Slew Rate | SR | V _I = 10V, R _L ≥ 2KΩ, C _L ≤ 100pF | | 0.5 | | | 0.5 | | V/μs |

ELECTRICAL CHARACTERISTICS(V_{CC} = +15V, V_{EE} = -15V, NOTE 1, unless otherwise specified)

| Characteristic | Symbol | Test Conditions | LM1458A/AI | | | LM1458/I | | | Unit |
|------------------------------|---------------------|---|------------|------|-----|----------|------|------|------|
| | | | Min | Typ | Max | Min | Typ | Max | |
| Input Offset Voltage | V _{IO} | R _S ≤ 10KΩ | | | 7.5 | | | 12 | mV |
| Input Offset Current | I _{IO} | | | | 300 | | | 400 | nA |
| Input Bias Current | I _{BIAS} | | | | 800 | | | 1000 | nA |
| Large Signal Voltage Gain | G _V | V _{O(P.P)} = ± 10V, R _L ≤ 2.0KΩ | 15 | | | 15 | | | V/mV |
| Common Mode Rejection Ratio | CMRR | R _S ≥ 10KΩ | 70 | 90 | | 70 | 90 | | dB |
| Power Supply Rejection Ratio | PSRR | R _S ≥ 10KΩ | 77 | 90 | | 77 | 90 | | dB |
| Output Voltage Swing | V _{O(P.P)} | R _L = 10KΩ | ± 12 | ± 14 | | ± 11 | ± 14 | | V |
| | | R _L = 2KΩ | ± 10 | ± 13 | | ± 9 | ± 13 | | |
| Input Voltage Range | V _{I(R)} | | ± 12 | | | ± 12 | | | V |

NOTE 1

LM1458/A: 0 °C ≤ T_A ≤ 70 °CLM1458I/AI: -25 °C ≤ T_A ≤ +85 °C

TYPICAL PERFORMANCE CHARACTERISTICS

Fig. 1 OPEN-LOOP VOLTAGE GAIN vs POWER SUPPLY VOLTAGES

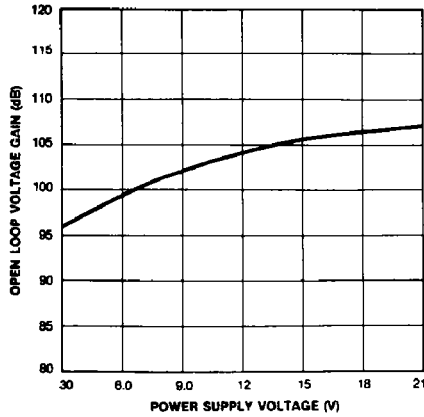


Fig. 2 OPEN-LOOP FREQUENCY RESPONSE

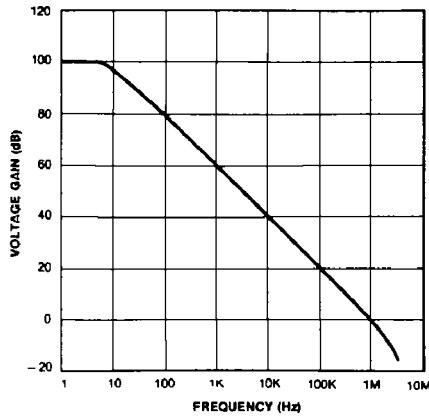


Fig. 3 POWER BANDWIDTH (LARGE SIGNAL SWING vs FREQUENCY)


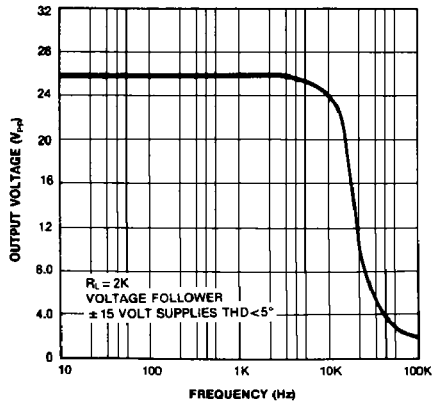


Fig. 4 OUTPUT VOLTAGE SWING vs LOAD RESISTANCE

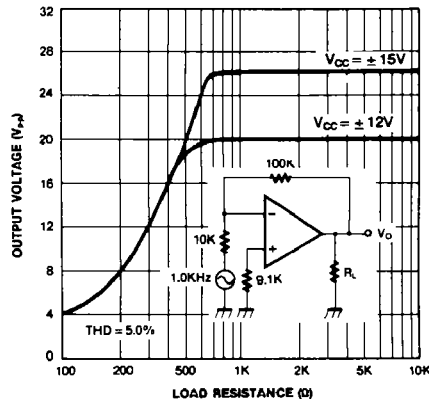

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

| | |
|----------------------|---------------|
| ACE ^x ™ | ISOPLANAR™ |
| CoolFET™ | MICROWIRE™ |
| CROSSVOLT™ | POP™ |
| E ² CMOS™ | PowerTrench™ |
| FACT™ | QS™ |
| FACT Quiet Series™ | Quiet Series™ |
| FAST® | SuperSOT™-3 |
| FASTr™ | SuperSOT™-6 |
| GTO™ | SuperSOT™-8 |
| HiSeC™ | TinyLogic™ |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|------------------------|---|
| Advance Information | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| Obsolete | Not In Production | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only. |